

Upright Cabinets

# T-23-HC

Upright Foodservice Refrigerator, 1 Full Solid Swing Door



| Dimensions                         |                                                     |
|------------------------------------|-----------------------------------------------------|
| External Width (mm)                | 686                                                 |
| External Depth (mm)                | 750                                                 |
| External Height (mm)               | 2074                                                |
| Exclusions                         | Depth does not include 13 mm for rear access panel. |
| Net Volume (Litres)                | 438                                                 |
| Gross Volume (Litres)              | 651                                                 |
| Supplied Shelves                   | 4                                                   |
| Shelf Size (L x D mm)              | 582 x 591                                           |
| Internal Net Height (mm)           | 1300                                                |
| Unpackaged Weight (kg)             | 100                                                 |
| Packaged Weight (kg)               | 123                                                 |
| Packaged Dimensions (W x D x H mm) | 909 x 788 x 2134                                    |
| Supplied Supports                  | Ø 64 mm castors (83 mm height)                      |

| Build                 |                                               |
|-----------------------|-----------------------------------------------|
| Door Description      | 1 Solid Swing Door                            |
| Door Opening          | Right (standard) or Left.                     |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front                                         |
| Ventilation Position  | Rear                                          |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74                                          |
| Internal Lighting     | LED                                           |
| Standard w/ Locks     | Standard.                                     |

| Technical                   |                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------|
| Temperature Holding         | 0.5 : 3.3°C                                                                        |
| Refrigerant                 | R290                                                                               |
| Voltage / Frequency / Phase | 220-240V/50-60Hz/1                                                                 |
| Amps                        | 1.3                                                                                |
| Wattage                     | 299                                                                                |
| Climate Class               | 5                                                                                  |
| Operating Statement         | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Testing Standard            | EN 16825                                                                           |
| EEC                         | C                                                                                  |
| EEl                         | 36.8                                                                               |
| kWh/24hr                    | 1.34                                                                               |
| kWh/Annum                   | 489                                                                                |
| Defrost Type                | Auto                                                                               |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland 0800 783 2049  
Europe +49 (0) 7622 6883 0  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueGermCustomerService@truemfg.com](mailto:TrueGermCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# T-23-HC

Upright Foodservice Refrigerator, 1 Full Solid Swing Door

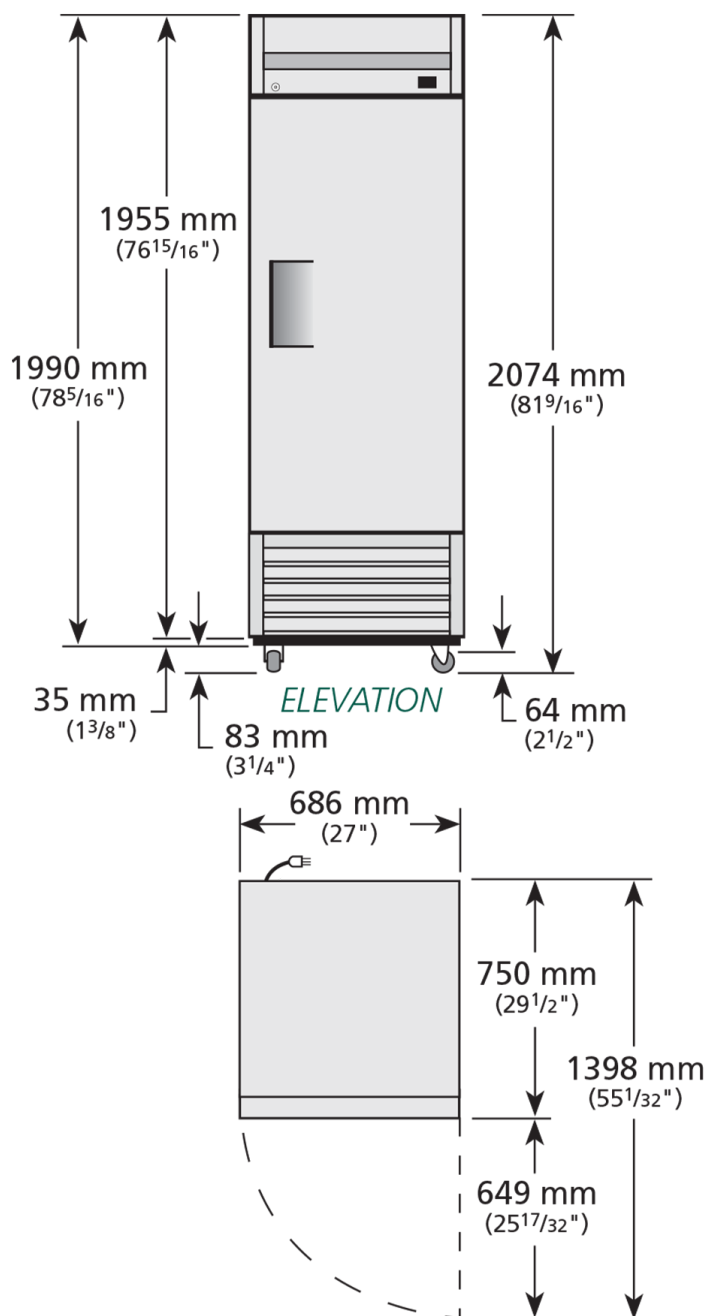

Specifications subject to change without notice.  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
 Europe  
 Australia

0800 783 2049  
 +49 (0) 7622 6883 0  
 +61 2 9619 9999

TFIUK@truemfg.com  
 TrueGermCustomerService@truemfg.com  
 TrueRefAus@truemfg.com

**true**  
 REFRIGERATION®